


**ZGNGR**

**VER1.2**

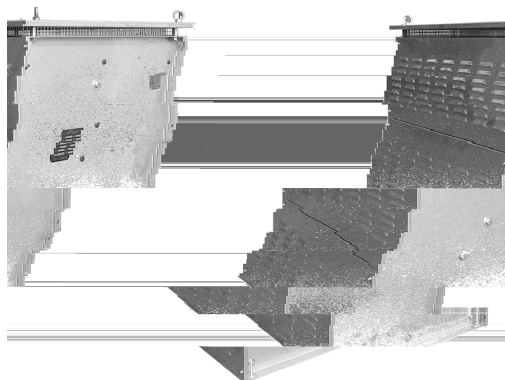

200A

10

DL/T620—1997

3.1.4


" 6-35KV

"


3.1.5 " 6KV 10KV

"

接地变或主变中性点

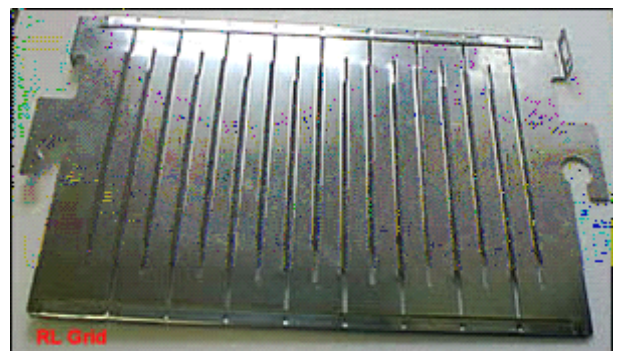

5

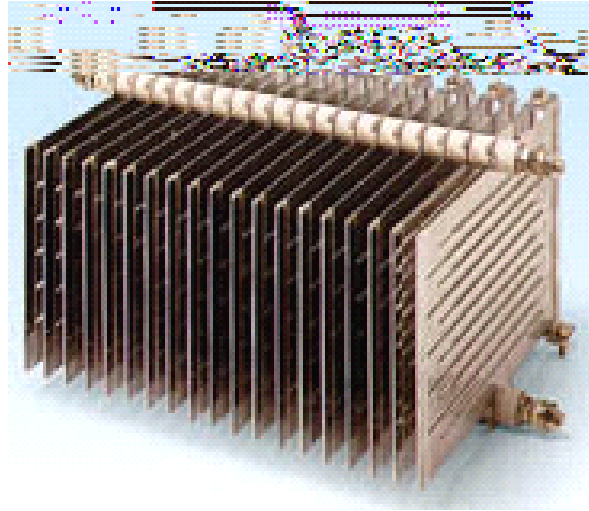

6

IEEE32

DL/T 780-2001

DL/T 620

GB6450

DL/T 621

GB311.2

GB1208



GB/T12944.2

GB8287.1

GB4208-93

IP

型号	系统额定电压 (kV)	短时允许通流 (A)	短时通流时间 (S)
ZGNGR6.3-600-10	6.3	600	10
ZGNGR6.3-500-10	6.3	500	10
ZGNGR6.3-400-10	6.3	400	10
ZGNGR6.3-200-10	6.3	200	10
ZGNGR6.3-100-10	6.3	100	10
ZGNGR6.3-10-10	6.3	10	10
ZGNGR10.5-800-10	10.5	800	10
ZGNGR10.5-600-10	10.5	600	10
ZGNGR10.5-500-10	10.5	500	10
ZGNGR10.5-400-10	10.5	400	10
ZGNGR10.5-200-10	10.5	200	10
ZGNGR10.5-100-10	10.5	100	10
ZGNGR10.5-60-10	10.5	60	10
ZGNGR10.5-30-10	10.5	30	10
ZGNGR10.5-10-10	10.5	10	10
ZGNGR10.5-6-10	10.5	6	10
ZGNGR20-630-10	20	630	10
ZGNGR20-1000-10	20	1000	10
ZGNGR35-3000-10	35	3000	10
ZGNGR35-2000-10	35	2000	10
ZGNGR35-1600-10	35	1600	10
ZGNGR35-1000-10	35	1000	10
ZGNGR35-500-10	35	500	10
ZGNGR35-400-10	35	400	10
ZGNGR35-200-10	35	200	10
ZGNGR35-100-10	35	100	10
ZGNGR35-20-10	35	20	10

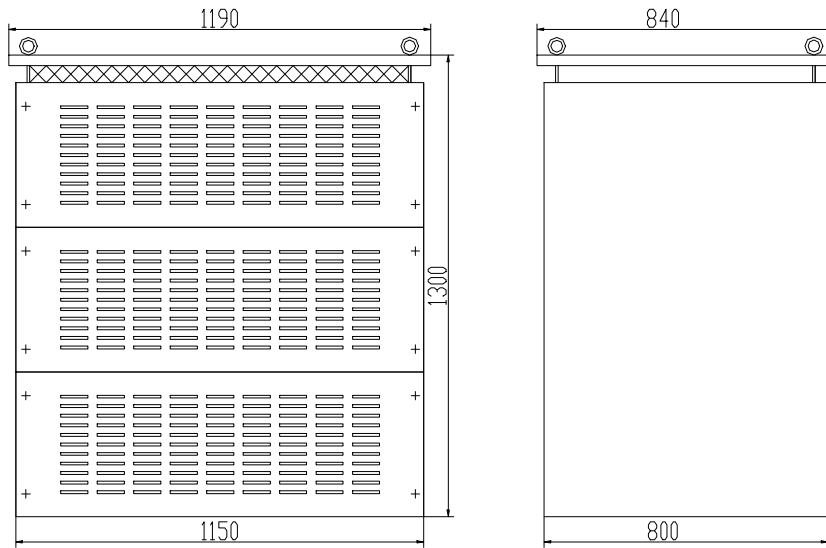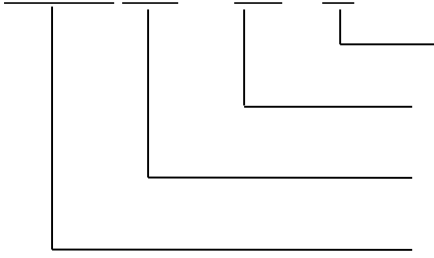

°C +50°C



智兴电气

